

Product data sheet

Miniature connectors




Product description	Push-Pull cable connector, Contacts: 5, 4.0 - 8.0 mm, shieldable, solder, IP67
Area	Push-Pull series 440
Order number	99 4813 00 05


Illustration



Scale drawing

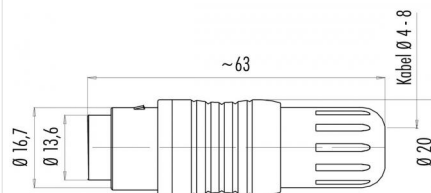

Contact arrangement (Plug-in side)



	X	Y
1	3,03	-1,75
2	3,03	1,75
3	0,00	3,50
4	-3,03	1,75
5	-3,03	-1,75

You can find the component part drawing and assembly instructions on the next page.

Technical data

General values

Connector design	cable connector
Connector locking system	Push-Pull
Termination	solder
Wire gauge (mm)	max. 0.75 mm ²
Wire gauge (AWG)	max. 18
Cable outlet	4.0 - 8.0 mm
Upper limit temperature	85 °C
Lower limit temperature	- 40 °C
Customs tariff number	85369010
Packaging Unit	50

Electrical values

Rated current (40 °C)	6 A
Rated voltage	250 V
Rated impulse voltage	1500 V
Pollution degree	1
Overvoltage category	I
Insulating material group	III
Insulation resistance	≥ 10 ¹⁰ Ω
EMC compliance	shieldable
Degree of protection	IP67
Mechanical operation	> 1000 Mating cycles


Material

Contact material	CuZn (brass)
Contact plating	Au (gold)
Contact body material	PBT (UL94 V-0)
Housing material	PA GF 25
REACH SVHC	CAS 7439-92-1 (Lead)

Product description **Push-Pull cable connector, Contacts: 5, 4.0 - 8.0 mm, shieldable, solder, IP67**


Area **Push-Pull series 440**
Order number **99 4813 00 05**

Component part drawing

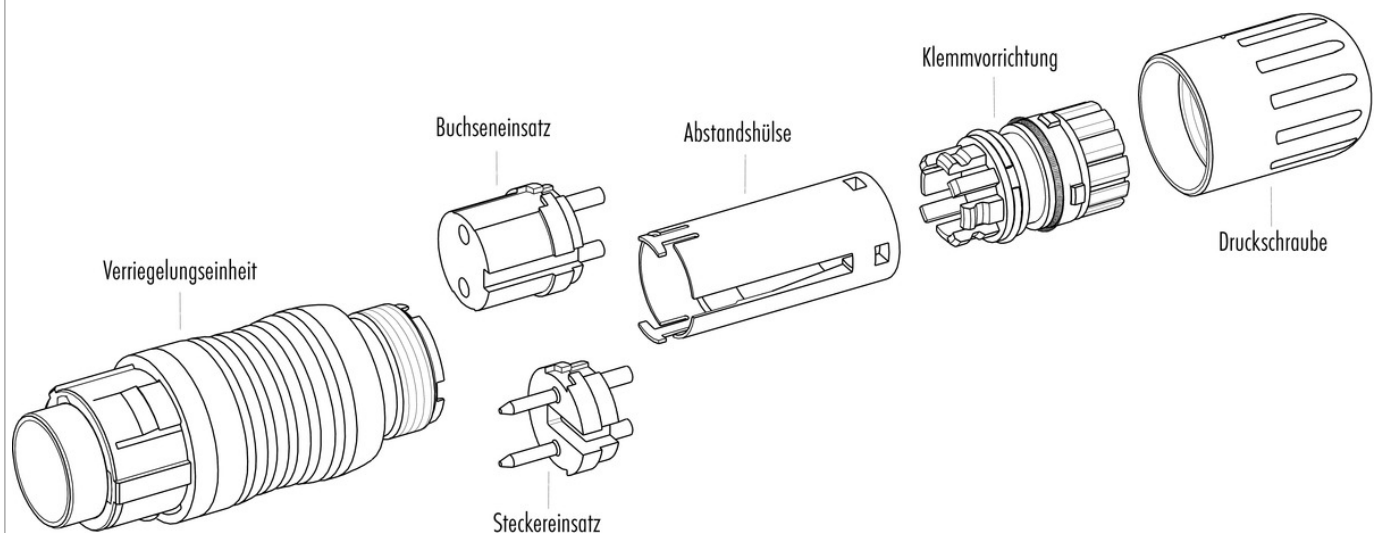

Assembly instructions / Panel cut-out

1. Abmonteln auf L = 33mm.
Umarmung nicht abstellen.
2. Druckschraube und Klemmvorrichtung aufstecken. Umarmung entfernen.
3. Litzen abisolieren und verzinnen.
4. Abschirmung aufschneiden und ausklappen. Die Abschirmung in der Krone runden einfügen.
5. Abstandshülse und Klemmvorrichtung verschieben.
6. Gesteckte Einheit nach hinten über Kabel schieben (ca. 10mm).
7. Einsätze anlöten.
8. Gesteckte Einheit nach vorne schieben bis sie in den Kontaktstecker einrastet.
9. Abschirmung in Richtung Abschirmung abstreifen und kürzen.
- zu lang: Litzen auf Dichtung - undichtet
zu kurz: kein Kontakt zu Wellenring
10. Montierte Einheit in Tügelhülse stecken und Druckschraube festziehen.

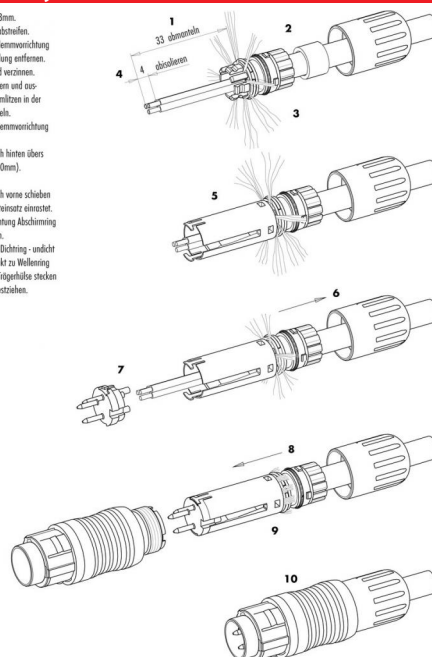

Product description	Push-Pull cable connector, Contacts: 5, 4.0 - 8.0 mm, shieldable, solder, IP67
Area	Push-Pull series 440
Order number	99 4813 00 05

Security notices

The connector must not be connected or separated under load. Non-observance and incorrect use can result in personal injury.

The connectors are designed for use in plant, control system and electrical equipment. The end user is responsible for checking whether the connectors are suitable for use in other applications.

Connectors used in electrical circuits containing hazardous life parts must only be assembled and used by or under the supervision of persons with the requisite electrotechnical training, taking the applicable regulations and standards into account.

Connectors with degree of protection IP 67 and IP 68 are not suitable for use under water. When used outdoors, the connectors must be separately protected against corrosion. For further information about IP degrees of protection refer to 'Technical support' in the Download Centre.

The connector is not suitable for mains voltages. Please observe the pollution degrees and the overvoltage category. For further information refer to 'Technical support' in the Download Centre.