Product data sheet


Miniature connectors




Product description M16 IP67 cable connector, Contacts: 7, 4.0 - 8.0 mm, shielding is not possible, solder, IP67, UL

M16 IP67 series 423 Order number 99 5125 40 07

Illustration





You can find the component part drawing and assembly instructions on the next page.

Technical data

General values

Connector design Connector locking system Termination Wire gauge (mm) Wire gauge (AWG) Cable outlet Upper limit temperature Lower limit temperature Customs tariff number Packaging Unit

Cable data

Approval 1

cable connector screw 40

solder max. 0.75 mm² max. 18 4.0 - 8.0 mm 95 ℃ − 30 °C 85369010

UL

Electrical values

Rated current (40 °C) Rated voltage Rated impulse voltage Pollution degree Overvoltage category Insulating material group Insulation resistance EMC compliance Degree of protection Mechanical operation

Material

Contact material Contact plating Contact body material REACH SVHC

CuZn (brass) Au (gold) PBT (UL94 V-0) CAS 7439-92-1 (Lead)

shielding is not possible

> 500 Mating cycles

5 A

125 V

800 V

 $\geq 10^{10} \, \Omega$


Product data sheet

Miniature connectors



Product description M16 IP67 cable connector, Contacts: 7, 4.0 - 8.0 mm, shielding is not possible, solder, IP67, UL

Area **M16 IP67 series 423**Order number **99 5125 40 07**

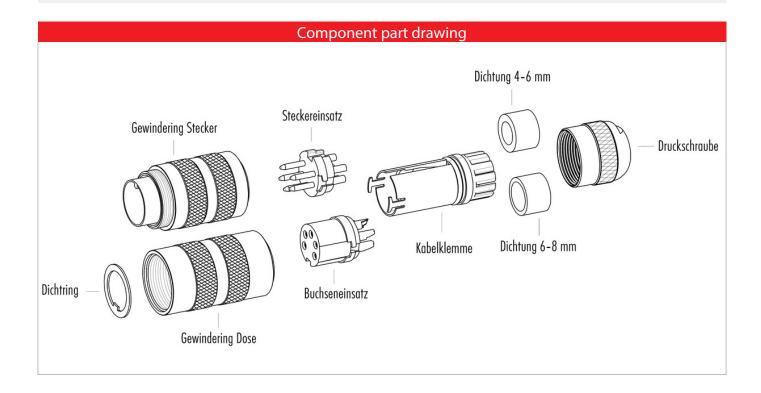

Gerade Version (Ausführung mit Schirmklemmring) 1. Druckschraube, Klemmkorb, Dichtung, Distanzhülse und ersten Schirmklemmring auffädeln. 2. Litzen ablösene, Schirm aufweiten und zweiten Schirmklemmring auffädeln. 3. Litzen anlöten, Distanzhülse montieren, die beiden Klemmringe mit dem Schirm zusammenschieben und überstehenden Schirm abschneiden. 4. Übrige Teile gemäß Darstellung montieren.

Product data sheet

Miniature connectors



Product description M16 IP67 cable connector, Contacts: 7, 4.0 - 8.0 mm, shielding is not possible, solder, IP67, UL

Area **M16 IP67 series 423**Order number **99 5125 40 07**

Security notices

The connector must not be connected or separated under load. Non-observance and incorrect use can result in personal injury.

The connectors are designed for use in plant, control system and electrical equipment. The end user is responsible for checking whether the connectors are suitable for use in other applications.

Connectors used in electrical circuits containing hazardous life parts must only be assembled and used by or under the supervision of persons with the requisite electrotechnical training, taking the applicable regulations and standards into account.

Connectors with degree of protection IP 67 and IP 68 are not suitable for use under water. When used outdoors, the connectors must be separately protected against corrosion. For further information about IP degrees of protection refer to 'Technical support' in the Download Centre.

To lock the cable connector to the equipment connector, the threaded ring is tightened until it is 'finger-tight' (approx. 50 cNm).