Product data sheet


Miniature connectors




Product description M16 IP67 male panel mount connector, Contacts: 5, shielding is not possible, solder, IP67, UL, front mounting

M16 IP67 series 723 Order number 09 0115 89 05

Illustration





You can find the assembly instructions on the next page.

Technical data

General values

Connector design Connector locking system Termination Wire gauge (mm) Wire gauge (AWG) Upper limit temperature Lower limit temperature Customs tariff number Packaging Unit

Cable data

Approval 1

male panel mount connector

screw solder 0.75 mm² 18 95 ℃ – 40 °C 85369010 20

UL

Electrical values

Rated current (40 °C) 6 A Rated voltage 250 V Rated impulse voltage 1500 V Pollution degree Overvoltage category Insulating material group $\geq 10^{10} \, \Omega$ Insulation resistance EMC compliance shielding is not possible Degree of protection

Mechanical operation

> 500 Mating cycles

Material

Contact material Contact plating Contact body material Housing material REACH SVHC

CuZn (brass) Au (gold) PBT (UL94 V-0) Zinc die-cast nickel-plated CAS 7439-92-1 (Lead)


Product data sheet

Miniature connectors



Product description M16 IP67 male panel mount connector, Contacts: 5, shielding is not possible, solder, IP67, UL, front mounting

Area **M16 IP67 series 723**Order number **09 0115 89 05**

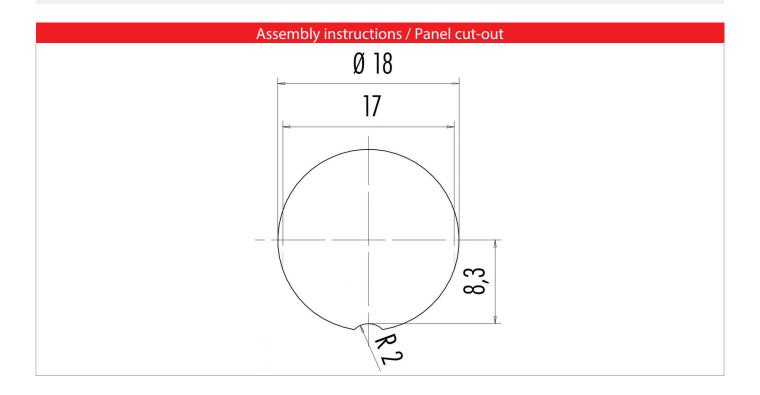

Product data sheet

Miniature connectors



Product description M16 IP67 male panel mount connector, Contacts: 5, shielding is not possible, solder, IP67, UL, front mounting

Area **M16 IP67 series 723**Order number **09 0115 89 05**

Security notices

The connector must not be connected or separated under load. Non-observance and incorrect use can result in personal injury.

The connectors are designed for use in plant, control system and electrical equipment. The end user is responsible for checking whether the connectors are suitable for use in other applications.

Connectors with degree of protection IP 67 and IP 68 are not suitable for use under water. When used outdoors, the connectors must be separately protected against corrosion. For further information about IP degrees of protection refer to 'Technical support' in the Download Centre.

The connector is not suitable for mains voltages. Please observe the pollution degrees and the overvoltage category. For further information refer to 'Technical support' in the Download Centre.