### **Product data sheet**


# Miniature connectors




Product description M16 IP67 cable connector, Contacts: 12, 8.0 - 10.0 mm, shieldable, solder, IP67, UL

M16 IP67 series 423 Order number 99 5829 15 12







You can find the component part drawing and assembly instructions on the next page.

# **Technical data**

## **General values**

Connector design Connector locking system Termination Wire gauge (mm) Wire gauge (AWG) Cable outlet Upper limit temperature Lower limit temperature Customs tariff number Packaging Unit

### **Cable data**

Approval 1

cable connector screw 85369010

solder max. 0.25 mm<sup>2</sup> max. 24 8.0 - 10.0 mm 95 ℃ − 30 °C

20

UL

# Material

Contact material Contact plating Contact body material REACH SVHC

**Electrical values** 

Rated current (40 °C)

Rated impulse voltage

Overvoltage category

Insulation resistance

Degree of protection

Mechanical operation

Insulating material group

Rated voltage

Pollution degree

EMC compliance

3 A 60 V 500 V Ш  $\geq 10^{10} \, \Omega$ shieldable IP67 > 500 Mating cycles

CuZn (brass) Au (gold) PBT (UL94 V-0) CAS 7439-92-1 (Lead)


### **Product data sheet**

# Miniature connectors



Product description M16 IP67 cable connector, Contacts: 12, 8.0 - 10.0 mm, shieldable, solder, IP67, UL

Area **M16 IP67 series 423**Order number **99 5829 15 12** 

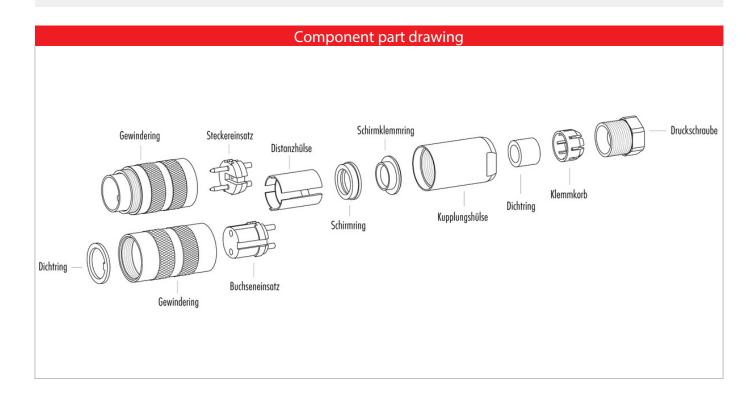

# Gerade Version (Ausführung mit Schirmklemmring) 1. Druckschraube, Klemmkorb, Dichtung, Distanzhülse und ersten Schirmklemmring auffädeln. 2. Litzen ablösene, Schirm aufweiten und zweiten Schirmklemmring auffädeln. 3. Litzen anlöten, Distanzhülse montieren, die beiden Klemmringe mit dem Schirm zusammenschieben und überstehenden Schirm abschneiden. 4. Übrige Teile gemäß Darstellung montieren.

## **Product data sheet**

# Miniature connectors



Product description M16 IP67 cable connector, Contacts: 12, 8.0 - 10.0 mm, shieldable, solder, IP67, UL

Area **M16 IP67 series 423**Order number **99 5829 15 12** 

# Security notices

The connectors are designed for use in plant, control system and electrical equipment. The end user is responsible for checking whether the connectors are suitable for use in other applications.

Connectors with degree of protection IP 67 and IP 68 are not suitable for use under water. When used outdoors, the connectors must be separately protected against corrosion. For further information about IP degrees of protection refer to 'Technical support' in the Download Centre.

To lock the cable connector to the equipment connector, the threaded ring is tightened until it is 'finger-tight' (approx. 50 cNm).