


Product description	Bajonett HEC cable connector, Contacts: 4+3+PE, 7.0 - 17.0 mm, shielding is not possible, crimp (Crimp contacts must be ordered separately), IP68/IP69K, UL, VDE
Area	Bajonett HEC series 696
Order number	99 6501 100 08


Illustration



Scale drawing

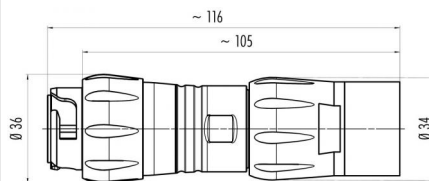

Contact arrangement (Plug-in side)



	X	Y
1	-3,68	5,50
2	0	-6,60
3	3,68	5,50
4	-7,25	0,20
5	-5,90	-4,20
6	5,90	-4,20
7	7,25	0,20
PE	0	0

1, 2, 3 ⊕ Ø 2,5 mm
4, 5, 6, 7 Ø 1,6 mm

Technical data

General values

Connector design	cable connector
Connector locking system	Bayonet
Termination	crimp (Crimp contacts must be ordered separately)
Wire gauge (mm)	0.14 - 2.50 mm ²
Wire gauge (AWG)	26 - 14
Cable outlet	7.0 - 17.0 mm
Upper limit temperature	100 °C
Lower limit temperature	- 40 °C
Customs tariff number	85369010
Packaging Unit	100

Cable data

Approval 1	UL
Approval 2	VDE

Electrical values

Rated current (40 °C)	3 A signal / 25 A Power (20 A UL)
Rated voltage	60 V Signal / 400 V Power V
Rated impulse voltage	1000 V
Pollution degree	3
Overvoltage category	III
Insulating material group	I
Insulation resistance	> 10 ⁸ Ω
EMC compliance	shielding is not possible
Degree of protection	IP68/IP69K
Mechanical operation	> 1000 Mating cycles

Material

Contact material	depending on crimp contact (accessory)
Contact body material	PA
Housing material	PA
REACH SVHC	No pollutants

Product description	Bajonett HEC cable connector, Contacts: 4+3+PE, 7.0 - 17.0 mm, shielding is not possible, crimp (Crimp contacts must be ordered separately), IP68/IP69K, UL, VDE
Area	Bajonett HEC series 696
Order number	99 6501 100 08

Security notices

The connector must not be connected or separated under load. Non-observance and incorrect use can result in personal injury.

The connectors are designed for use in plant, control system and electrical equipment. The end user is responsible for checking whether the connectors are suitable for use in other applications.

Connectors used in electrical circuits containing hazardous life parts must only be assembled and used by or under the supervision of persons with the requisite electrotechnical training, taking the applicable regulations and standards into account.