


Product description **M8 integrated plug, Contacts: 4, not shielded, solder, IP65**

Area **M8 series 718**
Order number **86 6919 0002 30704**


Illustration



Scale drawing

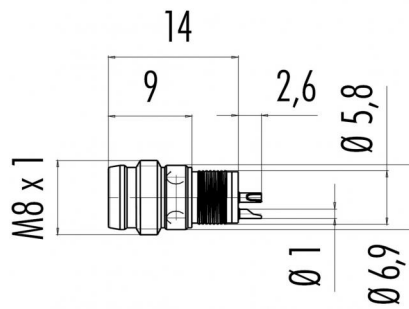

Contact arrangement (Plug-in side)



	X	Y
1	-1,70	-0,50
2	-1,08	1,45
3	1,70	-0,50
4	1,08	1,45

Technical data

General values

Notice

Please note that, due to the change from the old to the new order number, there may be deviations in the technical specifications. For questions about product details, please use the 'Contact Customer Service' form on the right.

Connector design
Connector locking system
Termination
Wire gauge (mm)
Wire gauge (AWG)
Upper limit temperature
Lower limit temperature
Customs tariff number
Packaging Unit

integrated plug
snap
solder
0.25 mm²
24
70 °C
- 40 °C
85369010
100

Electrical values

Rated current (40 °C) 4 A
Rated voltage 30 V
Rated impulse voltage 1500 V
Pollution degree 3
Overvoltage category II
Insulating material group II
EMC compliance not shielded
Degree of protection IP65
Mechanical operation > 100 Mating cycles

Material

Contact material CuZn (brass)
Contact plating Au (gold)
Contact body material PA
Housing material CuZn (Brass nickel plated)
REACH SVHC CAS 7439-92-1 (Lead)

Product description **M8 integrated plug, Contacts: 4, not shielded, solder, IP65**

Area **M8 series 718**

Order number **86 6919 0002 30704**

Security notices

The connectors are designed for use in plant, control system and electrical equipment. The end user is responsible for checking whether the connectors are suitable for use in other applications.

Connectors with degree of protection IP 67 and IP 68 are not suitable for use under water. When used outdoors, the connectors must be separately protected against corrosion. For further information about IP degrees of protection refer to 'Technical support' in the Download Centre.