


Product description	<b>M12-B male panel mount connector, Contacts: 5, not shielded, solder, IP67, UL, M16x1.5</b>
Area	<b>M12-B series 766</b>
Order number	<b>86 4333 1002 00005</b>


**Illustration**



**Scale drawing**

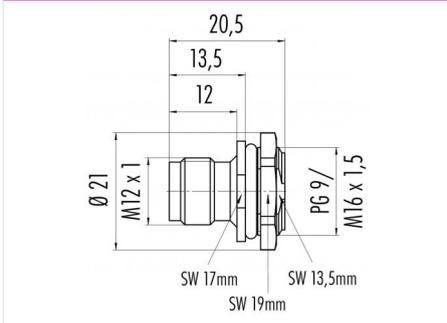

**Contact arrangement (Plug-in side)**

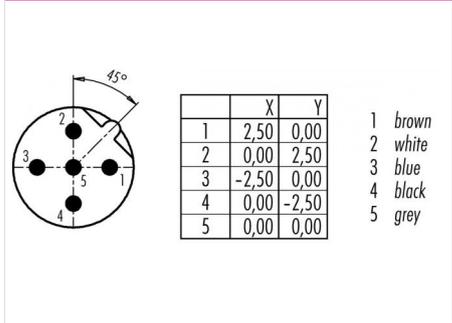

You can find the assembly instructions on the next page.

**Technical data**

**General values**

Notice	Please note that, due to the change from the old to the new order number, there may be deviations in the technical specifications. For questions about product details, please use the 'Contact Customer Service' form on the right.
Connector design	male panel mount connector
Connector locking system	screw
Termination	solder
Wire gauge (mm)	0.25 mm <sup>2</sup>
Wire gauge (AWG)	24
Upper limit temperature	85 °C
Lower limit temperature	- 40 °C
Customs tariff number	85369010
Packaging Unit	250

**Electrical values**

Rated current (40 °C)	4 A
Rated voltage	60 V
Rated impulse voltage	1500 V
Pollution degree	3
Overvoltage category	II
Insulating material group	II
Insulation resistance	> 10 <sup>8</sup> Ω
EMC compliance	not shielded
Degree of protection	IP67
Mechanical operation	> 100 Mating cycles

**Material**

Contact material	CuZn (brass)
Contact plating	Au (gold)
Contact body material	PA
Housing material	PA
REACH SVHC	CAS 7439-92-1 (Lead)

**Cable data**

Approval 1	UL
------------	----

Product description	<b>M12-B male panel mount connector, Contacts: 5, not shielded, solder, IP67, UL, M16x1.5</b>
Area	<b>M12-B series 766</b>
Order number	<b>86 4333 1002 00005</b>

Assembly instructions / Panel cut-out

**Mit Flanke als Verbinder**

**Mit Deckungsbohrung**

**Aspektmaßwerte**

Montagehöhe/Polhöhe	4,25 mm
Montagehöhe/Schraubflanschhöhe	5,00 mm
Kontaktgröße/Polhöhe	1,25 mm

Lebensdauerklasse T (Jahre)	
Lebensdauerklasse	min. (Jahre)
Lebensdauerklasse 1	2
Lebensdauerklasse 2	3,5
Lebensdauerklasse 3	5
Lebensdauerklasse 4	7,5
Lebensdauerklasse 5	10
Lebensdauerklasse 6	15
Lebensdauerklasse 7	20
Lebensdauerklasse 8	25
Lebensdauerklasse 9	30
Lebensdauerklasse 10	35
Lebensdauerklasse 11	40
Lebensdauerklasse 12	45
Lebensdauerklasse 13	50
Lebensdauerklasse 14	55
Lebensdauerklasse 15	60
Lebensdauerklasse 16	65
Lebensdauerklasse 17	70
Lebensdauerklasse 18	75
Lebensdauerklasse 19	80
Lebensdauerklasse 20	85
Lebensdauerklasse 21	90
Lebensdauerklasse 22	95
Lebensdauerklasse 23	100

**Merkmale**

- \* Keine Flammschutzmittel
- \*\* Beschützte bis 1,5 mm Gewinde
- \*\*\* 1,5 mm Gewinde schneiden
- † Flanke
- †† Gewinde in Gehäuse

Product description	<b>M12-B male panel mount connector, Contacts: 5, not shielded, solder, IP67, UL, M16x1.5</b>
Area	<b>M12-B series 766</b>
Order number	<b>86 4333 1002 00005</b>

## Security notices

The connectors are designed for use in plant, control system and electrical equipment. The end user is responsible for checking whether the connectors are suitable for use in other applications.

Connectors with degree of protection IP 67 and IP 68 are not suitable for use under water. When used outdoors, the connectors must be separately protected against corrosion. For further information about IP degrees of protection refer to 'Technical support' in the Download Centre.