


Product description **M8 female panel mount connector, Contacts: 4, not shielded, dip-solder, IP67, UL, front mounting**

Area **M8 series 718**
Order number **86 6518 1123 00004**


Illustration



Scale drawing



Contact arrangement (Plug-in side)



	X	Y
1	1,70	-0,50
2	1,08	1,45
3	-1,70	-0,50
4	-1,08	1,45

You can find the assembly instructions on the next page.

Technical data

General values

Notice

Please note that, due to the change from the old to the new order number, there may be deviations in the technical specifications. For questions about product details, please use the 'Contact Customer Service' form on the right.

Connector design
Connector locking system
Termination
Upper limit temperature
Lower limit temperature
Customs tariff number
Packaging Unit

female panel mount connector
screw
dip-solder
85 °C
- 40 °C
85369010
20

Cable data

Approval 1

UL

Electrical values

Rated current (40 °C)
Rated voltage
Rated impulse voltage
Pollution degree
Overvoltage category
Insulating material group
EMC compliance
Degree of protection
Mechanical operation
Contact length

4 A
60 V
1500 V
3
II
II
not shielded
IP67
> 100 Mating cycles
9.5 mm

Material

Contact material
Contact plating
Contact body material
Housing material
REACH SVHC

CuSn (bronze)
Au (gold)
PA
CuZn (Brass nickel plated)
CAS 80-05-7
(4,4'-isopropylidendiphenol)
CAS 7439-92-1 (Lead)
CAS 61788-32-7 (Terphenyl, hydrogenated)

Product description

M8 female panel mount connector, Contacts: 4, not shielded, dip-solder, IP67, UL, front mounting

Area

M8 series 718


Order number

86 6518 1123 00004

Assembly instructions / Panel cut-out


1. Einbauvorschlag

Mit Fläche als Verdrehschutz

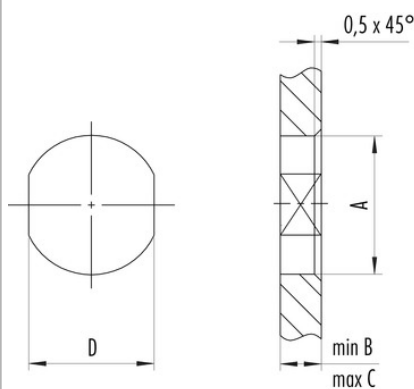


2. Einbauvorschlag

Mit Durchgangsbohrung

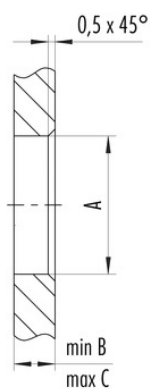

3. Einbauvorschlag

Mit Gewinde, einschraubbar

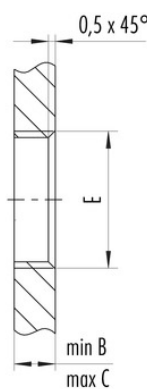

Gewinde E	A	B	C	D
M8 x 1	8,1	2,0	3,5	7,1
M10 x 0,75	10,1	2,0	6,5	9,1
M12 x 1	12,1	2,5	4,5	10,0

Anzugsdrehmoment 1 Nm

Product description	M8 female panel mount connector, Contacts: 4, not shielded, dip-solder, IP67, UL, front mounting
Area	M8 series 718
Order number	86 6518 1123 00004

Security notices

The connectors are designed for use in plant, control system and electrical equipment. The end user is responsible for checking whether the connectors are suitable for use in other applications.

Connectors with degree of protection IP 67 and IP 68 are not suitable for use under water. When used outdoors, the connectors must be separately protected against corrosion. For further information about IP degrees of protection refer to 'Technical support' in the Download Centre.