Product data sheet


Power connectors



Product description

RD30 male panel mount connector, Contacts: 24, shielding is not possible, solder, IP65

Area Order number RD30 series 694 99 0739 00 24

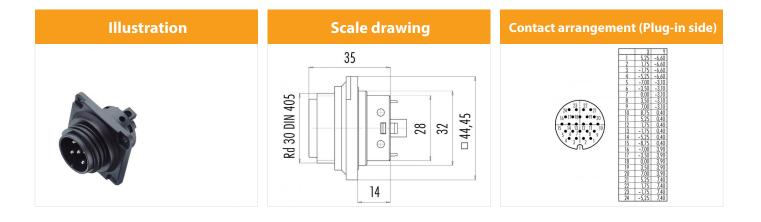

You can find the assembly instructions on the next page.

Technical data

General values

Connector design Connector locking system Termination Wire gauge (mm) Wire gauge (AWG) Upper limit temperature Customs tariff number Packaging Unit male panel mount connector screw solder max. 0.25 mm² max. 24 100 °C 85369010 20

Electrical values

Rated current (40 °C) Rated voltage Rated impulse voltage Pollution degree Overvoltage category Insulating material group Insulation resistance EMC compliance Degree of protection Mechanical operation

Material

Contact material Contact plating Contact body material Housing material REACH SVHC 3 A 125 V 2500 V 3 III III $\geq 10^{10} \Omega$ shielding is not possible IP65 > 500 Mating cycles

CuZn (brass) Au (gold) PA (UL94 HB) PA CAS 7439-92-1 (Lead)

Product data sheet


Power connectors



Product description

RD30 male panel mount connector, Contacts: 24, shielding is not possible, solder, IP65

Area Order number RD30 series 694 99 0739 00 24

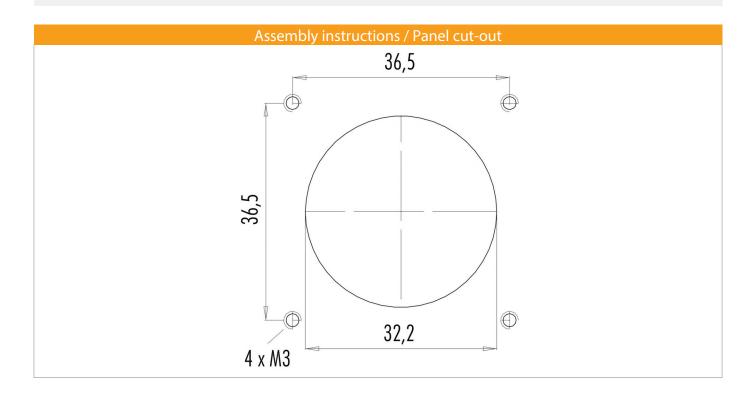

Product data sheet

Power connectors



Product description

RD30 male panel mount connector, Contacts: 24, shielding is not possible, solder, IP65

Area Order number RD30 series 694 99 0739 00 24

Security notices

The connector must not be connected or separated under load. Non-observance and incorrect use can result in personal injury.

The connectors are designed for use in plant, control system and electrical equipment. The end user is responsible for checking whether the connectors are suitable for use in other applications.

Connectors with degree of protection IP 67 and IP 68 are not suitable for use under water. When used outdoors, the connectors must be separately protected against corrosion. For further information about IP degrees of protection refer to 'Technical support' in the Download Centre.