

Product data sheet

Miniature connectors




| | |
|---------------------|---------------------------------------------------------------------------------------------------------------|
| Product description | M16 IP67 cable connector, Contacts: 8 DIN, 8.0 - 10.0 mm, shieldable, solder, IP68, UL, AISG compliant |
| Area | M16 IP67 series 423 |
| Order number | 99 5871 15 08 |


Illustration



Scale drawing

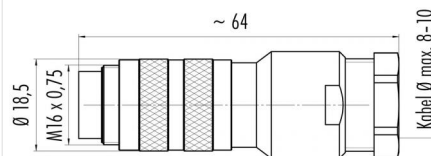

Contact arrangement (Plug-in side)



| | X | Y |
|---|-------|-------|
| 1 | 3,50 | 0,00 |
| 2 | 0,00 | 3,50 |
| 3 | -3,50 | 0,00 |
| 4 | 2,47 | 2,47 |
| 5 | -2,47 | 2,47 |
| 6 | 2,47 | -2,47 |
| 7 | -2,47 | -2,47 |
| 8 | 0,00 | -0,70 |

You can find the component part drawing and assembly instructions on the next page.

Technical data

General values

| | |
|--------------------------|---------------------------|
| Connector design | cable connector |
| Connector locking system | screw |
| Termination | solder |
| Wire gauge (mm) | max. 0.75 mm ² |
| Wire gauge (AWG) | max. 18 |
| Cable outlet | 8.0 - 10.0 mm |
| Upper limit temperature | 95 °C |
| Lower limit temperature | - 30 °C |
| Customs tariff number | 85369010 |
| Packaging Unit | 20 |

Cable data

| | |
|------------|----------------|
| Approval 1 | UL |
| Approval 2 | AISG compliant |

Electrical values

| | |
|---------------------------|----------------------|
| Rated current (40 °C) | 5 A |
| Rated voltage | 60 V |
| Rated impulse voltage | 500 V |
| Pollution degree | 1 |
| Overvoltage category | I |
| Insulating material group | III |
| Insulation resistance | ≥ 10 ¹⁰ Ω |
| EMC compliance | shieldable |
| Degree of protection | IP68 |
| | IP67 |
| Mechanical operation | > 500 Mating cycles |

Material

| | |
|-----------------------|----------------------|
| Contact material | CuZn (brass) |
| Contact plating | Ag (silver) |
| Contact body material | PBT (UL94 V-0) |
| REACH SVHC | CAS 7439-92-1 (Lead) |

Product description **M16 IP67 cable connector, Contacts: 8 DIN, 8.0 - 10.0 mm, shieldable, solder, IP68, UL, AISG compliant**

Area **M16 IP67 series 423**
Order number **99 5871 15 08**

Component part drawing



Assembly instructions / Panel cut-out

Gerade Version

(Ausführung mit Schirmklemmring)

1. Druckschraube, Klemmkorb, Dichtung, Distanzhülse und ersten Schirmklemmring auffädeln.
2. Litzen abisolieren, Schirm aufweiten und zweiten Schirmklemmring auffädeln.
3. Litzen anlöten, Distanzhülse montieren, die beiden Klemmringe mit dem Schirm zusammenschieben und überstehenden Schirm abschneiden.
4. Übrige Teile gemäß Darstellung montieren.



| | |
|---------------------|---------------------------------------------------------------------------------------------------------------|
| Product description | M16 IP67 cable connector, Contacts: 8 DIN, 8.0 - 10.0 mm, shieldable, solder, IP68, UL, AISG compliant |
| Area | M16 IP67 series 423 |
| Order number | 99 5871 15 08 |

Security notices

The connectors are designed for use in plant, control system and electrical equipment. The end user is responsible for checking whether the connectors are suitable for use in other applications.

Connectors with degree of protection IP 67 and IP 68 are not suitable for use under water. When used outdoors, the connectors must be separately protected against corrosion. For further information about IP degrees of protection refer to 'Technical support' in the Download Centre.

To lock the cable connector to the equipment connector, the threaded ring is tightened until it is 'finger-tight' (approx. 50 cNm).