### **Product data sheet**

# Connectors for medical applications





Product description Snap-In IP67 (miniature) male panel mount connector, Contacts: 12, not shielded, solder, IP67

Area Snap-In IP67 (miniature) series 720

Order number 99 9135 400 12

# Illustration





You can find the component part drawing and assembly instructions on the next page.

## Technical data

### **General values**

Connector design
Connector locking system
Termination
Wire gauge (mm)
Wire gauge (AWG)
Upper limit temperature
Lower limit temperature
Customs tariff number
Packaging Unit

male panel mount connector snap solder max. 0.25 mm<sup>2</sup> max. 24 85 °C - 40 °C 85369010 100

### **Electrical values**

Rated current (40 °C) 2 A Rated voltage 60 V Rated impulse voltage 800 V Pollution degree Overvoltage category Ш Insulating material group  $\geq 10^{10} \, \Omega$ Insulation resistance EMC compliance not shielded Degree of protection Mechanical operation > 500 Mating cycles

### **Material**

Contact material CuSn (bronze)
Contact plating Au (gold)
Contact body material PA (UL94 V-0)
Housing material PA
REACH SVHC CAS 7439-92-1 (Lead)

### **Product data sheet**


# Connectors for medical applications




Product description Snap-In IP67 (miniature) male panel mount connector, Contacts: 12, not shielded, solder, IP67

Area Snap-In IP67 (miniature) series 720

Order number 99 9135 400 12

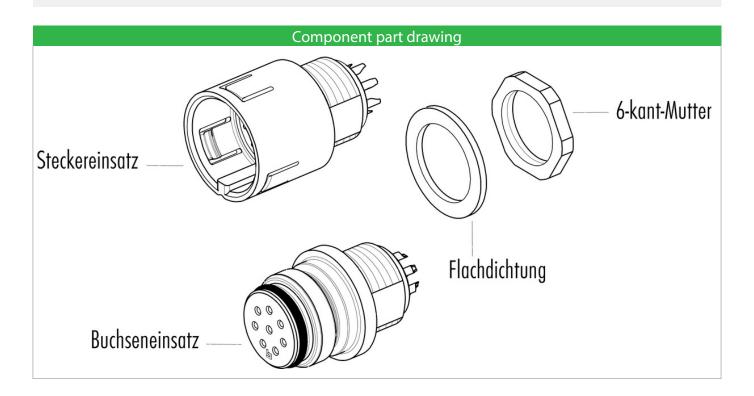

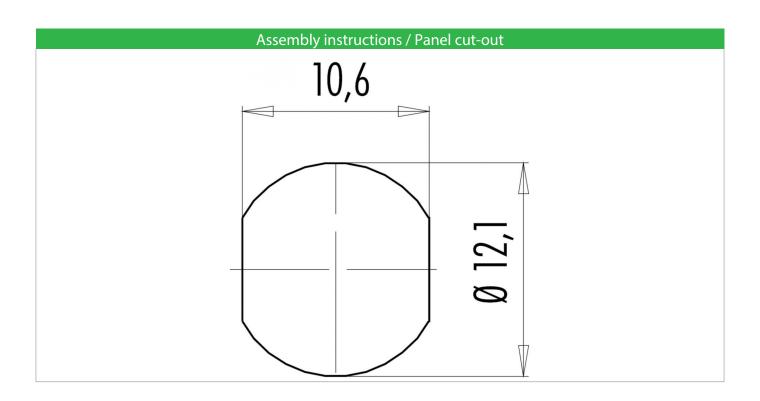

### **Product data sheet**

# Connectors for medical applications



Product description Snap-In IP67 (miniature) male panel mount connector, Contacts: 12, not shielded, solder, IP67

Area Snap-In IP67 (miniature) series 720

Order number 99 9135 400 12

### Security notices

The connectors are designed for use in plant, control system and electrical equipment. The end user is responsible for checking whether the connectors are suitable for use in other applications.

Connectors with degree of protection IP 67 and IP 68 are not suitable for use under water. When used outdoors, the connectors must be separately protected against corrosion. For further information about IP degrees of protection refer to 'Technical support' in the Download Centre.