


Product description **RD24 female cable connector, Contacts: 6+PE, 8.0 - 10.0 mm, shielding is not possible, screw clamp, IP67, PG11, PG11**
 Area **RD24 series 692**
 Order number **99 0218 110 07**


Illustration



Scale drawing

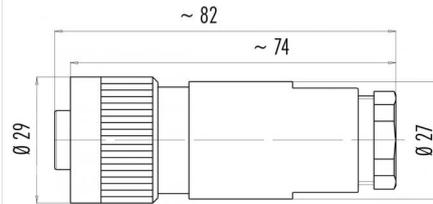

Contact arrangement (Plug-in side)



	X	Y
1	3,25	-3,54
2	4,76	0,63
3	2,22	4,26
4	-2,22	4,26
5	-4,76	0,63
6	-3,25	-3,54
PE	0,00	0,50

1
2
3
4
5
6
⊕ green/yellow

You can find the component part drawing and assembly instructions on the next page.

Technical data

General values

Connector design female cable connector
 Connector locking system screw
 Termination screw clamp
 Wire gauge (mm) max. 1.50 mm²
 Wire gauge (AWG) max. 16
 Cable outlet 8.0 - 10.0 mm
 Upper limit temperature 100 °C
 Lower limit temperature -40 °C
 Customs tariff number 85369010
 Packaging Unit 40

Electrical values


Rated current (40 °C) 10 A
 Rated voltage 250 V
 Rated impulse voltage 4000 V
 Pollution degree 3
 Overvoltage category III
 Insulating material group III
 Insulation resistance ≥ 10¹⁰ Ω
 EMC compliance shielding is not possible
 Degree of protection IP67
 Mechanical operation > 500 Mating cycles

Material


Contact material CuSn (bronze)
 Contact plating Ag (silver)
 Contact body material PBT (UL94 V-0)
 REACH SVHC CAS 7439-92-1 (Lead)

Product description	RD24 female cable connector, Contacts: 6+PE, 8.0 - 10.0 mm, shielding is not possible, screw clamp, IP67, PG11, PG11
Area	RD24 series 692
Order number	99 0218 110 07

Component part drawing

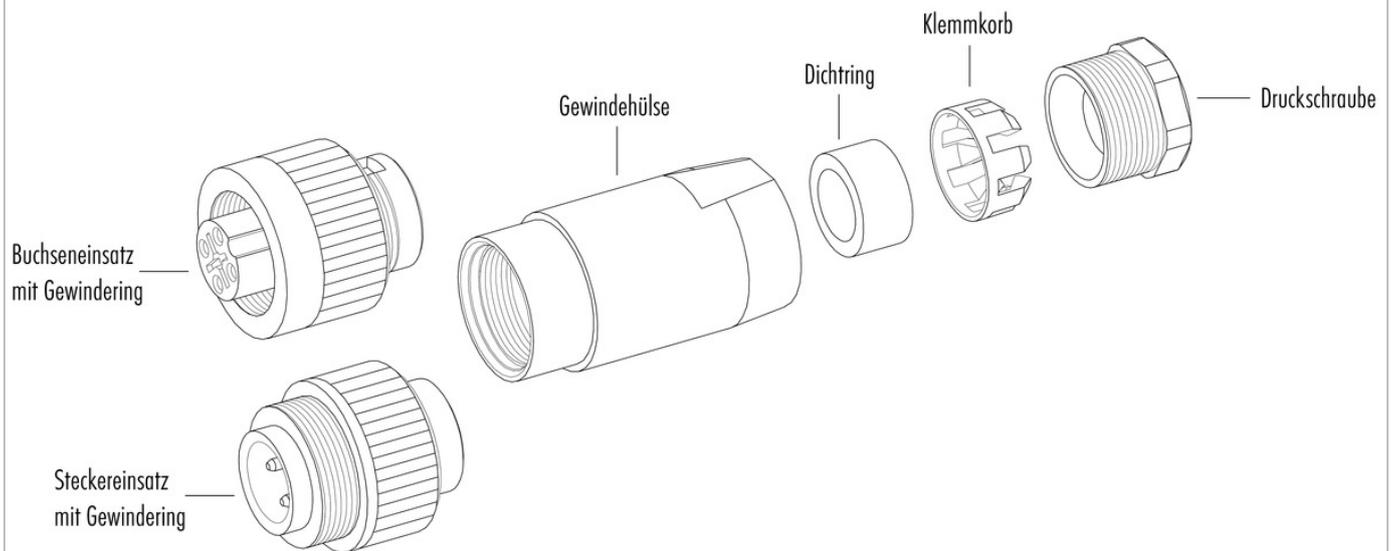

Assembly instructions / Panel cut-out

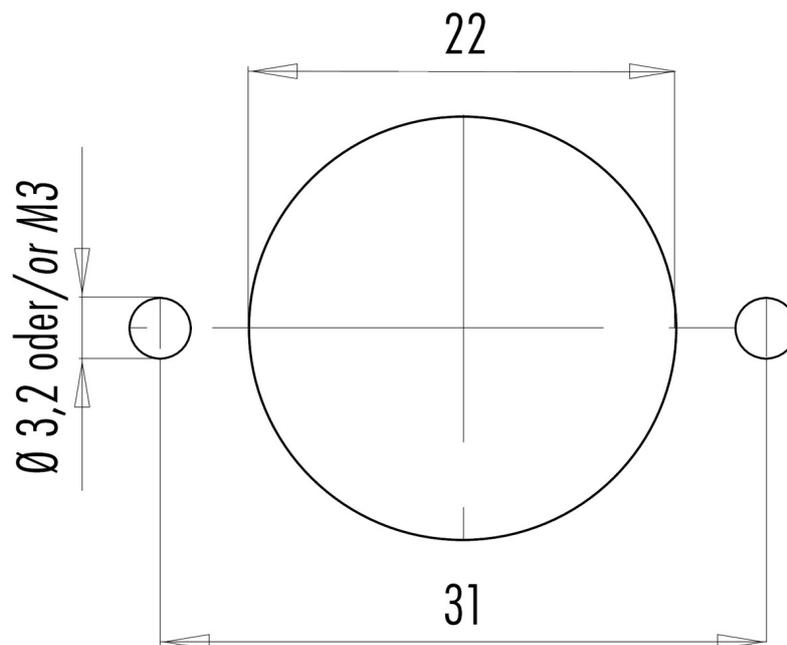

Product description	RD24 female cable connector, Contacts: 6+PE, 8.0 - 10.0 mm, shielding is not possible, screw clamp, IP67, PG11, PG11
Area	RD24 series 692
Order number	99 0218 110 07

Security notices

The connector must not be connected or separated under load. Non-observance and incorrect use can result in personal injury.

The connectors are designed for use in plant, control system and electrical equipment. The end user is responsible for checking whether the connectors are suitable for use in other applications.

To prevent the connector being opened unintentionally when used in electrical circuits containing hazardous life parts, the thread between the housing and the connector head must be secured using a suitable cyanoacrylate adhesive. This does not apply to connectors used in SELV and PELV circuits according to IEC 61140 (EN 61140, VDE 0140-1).

Connectors used in electrical circuits containing hazardous life parts must only be assembled and used by or under the supervision of persons with the requisite electrotechnical training, taking the applicable regulations and standards into account.

Connectors with degree of protection IP 67 and IP 68 are not suitable for use under water. When used outdoors, the connectors must be separately protected against corrosion. For further information about IP degrees of protection refer to 'Technical support' in the Download Centre.

To lock the cable connector to the equipment connector, the threaded ring is tightened until it is 'finger-tight' (approx. 50 cNm).