


Product description **M23 square male panel mount connector, Contacts: 9, shielding is not possible, solder, IP67, front mounting**

Area **M23 series 623**  
 Order number **99 4603 10 09**


### Illustration



### Scale drawing

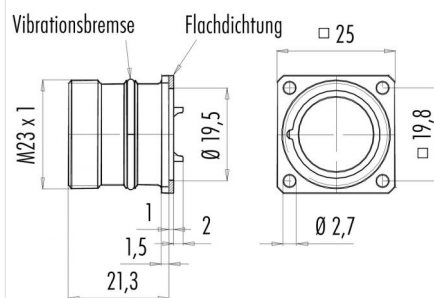

### Contact arrangement (Plug-in side)

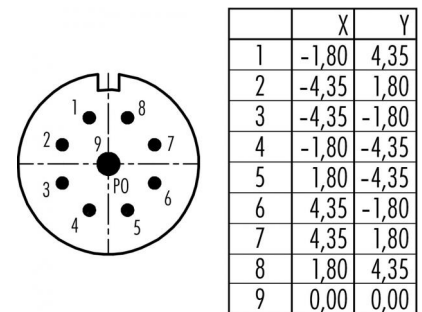

## Technical data

### General values

Connector design	square male panel mount connector
Connector locking system	screw
Termination	solder
Arrangement of contacts	left-handed
Wire gauge (mm)	8x1.50 / 1x2.50 mm <sup>2</sup>
Wire gauge (AWG)	8x16 / 1x14
Upper limit temperature	125 °C
Lower limit temperature	-20 °C
Customs tariff number	85369010
Packaging Unit	40

### Electrical values

Rated current (40 °C)	8 x 8 A / 1 x 20 A
Rated voltage	300 V
Rated impulse voltage	2500 V
Pollution degree	3
Overvoltage category	II
Insulating material group	III
Insulation resistance	≥ 10 <sup>10</sup> Ω
EMC compliance	shielding is not possible
Degree of protection	IP67
Mechanical operation	> 50 Mating cycles

### Material

Contact material	CuZn (brass)
Contact plating	Au (gold)
Contact body material	PBT/PA66
Housing material	Zinc die-cast nickel-plated
REACH SVHC	CAS 7439-92-1 (Lead)

Product description	<b>M23 square male panel mount connector, Contacts: 9, shielding is not possible, solder, IP67, front mounting</b>
Area	<b>M23 series 623</b>
Order number	<b>99 4603 10 09</b>

## Security notices

The connector must not be connected or separated under load. Non-observance and incorrect use can result in personal injury.

The connectors are designed for use in plant, control system and electrical equipment. The end user is responsible for checking whether the connectors are suitable for use in other applications.

Connectors with degree of protection IP 67 and IP 68 are not suitable for use under water. When used outdoors, the connectors must be separately protected against corrosion. For further information about IP degrees of protection refer to 'Technical support' in the Download Centre.