

Product data sheet

Miniature connectors




Product description	Push-Pull female cable connector, Contacts: 6 DIN, 4.0 - 8.0 mm, shieldable, solder, IP67
Area	Push-Pull series 440
Order number	99 4818 00 06


Illustration



Scale drawing

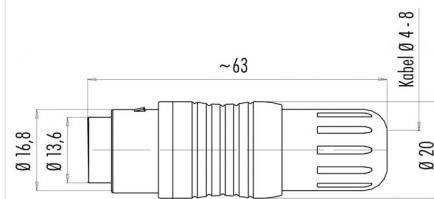

Contact arrangement (Plug-in side)



	X	Y
1	-3,03	-1,75
2	-3,03	1,75
3	0,00	3,50
4	3,03	1,75
5	3,03	-1,75
6	0,00	0,00

You can find the component part drawing and assembly instructions on the next page.

Technical data

General values

Connector design	female cable connector
Connector locking system	Push-Pull
Termination	solder
Wire gauge (mm)	max. 0.75 mm ²
Wire gauge (AWG)	max. 18
Cable outlet	4.0 - 8.0 mm
Upper limit temperature	85 °C
Lower limit temperature	- 40 °C
Customs tariff number	85369010
Packaging Unit	50

Electrical values

Rated current (40 °C)	5 A
Rated voltage	125 V
Rated impulse voltage	800 V
Pollution degree	1
Overvoltage category	I
Insulating material group	III
Insulation resistance	≥ 10 ¹⁰ Ω
EMC compliance	shieldable
Degree of protection	IP67
Mechanical operation	> 1000 Mating cycles

Material

Contact material	CuSn (bronze)
Contact plating	Au (gold)
Contact body material	PBT (UL94 V-0)
Housing material	PA GF 25

Product description

Push-Pull female cable connector, Contacts: 6 DIN, 4.0 - 8.0 mm, shieldable, solder, IP67


Area

Push-Pull series 440

Order number


99 4818 00 06

Component part drawing

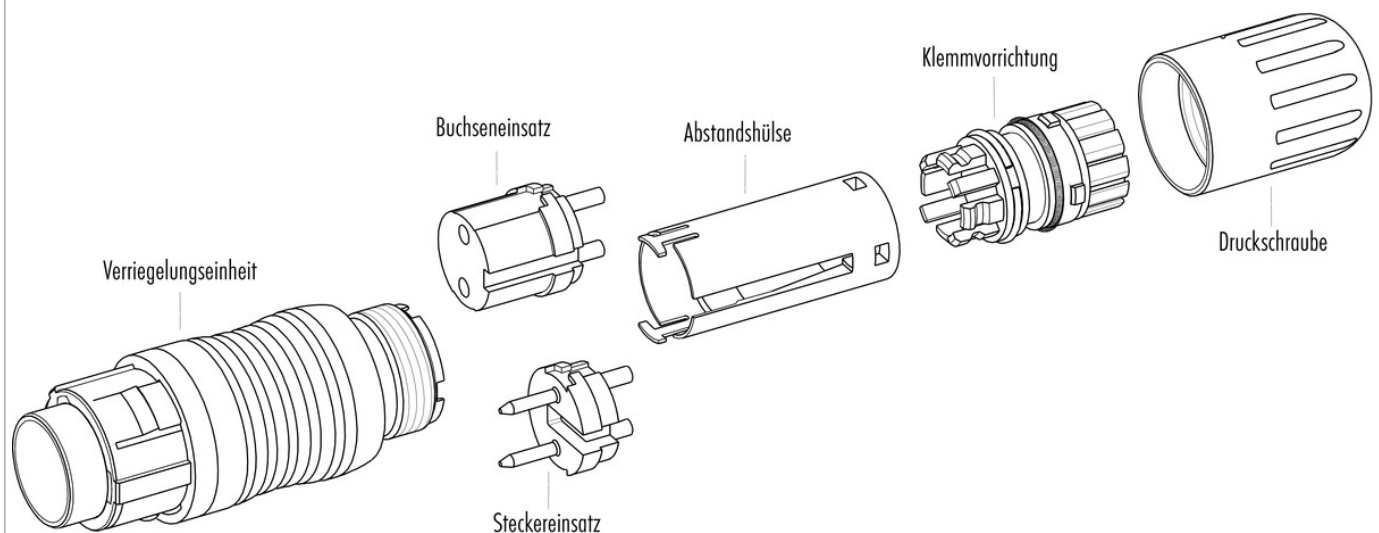

Assembly instructions / Panel cut-out

1. Abmonteln auf L = 33mm.
Ummantelung nicht abstreifen.
2. Druckschraube und Klemmvorrichtung aufstecken. Ummantelung entfernen.
3. Litzen abisolieren und verzinnen.
4. Abschirmung aufklappen und ausklappen. Die Abschirmung in der Krone runden einfügen.
5. Abstandshülse und Klemmvorrichtung versetzen.
6. Gesteckte Einheit nach hinten über Kabel schieben (ca. 10mm).
7. Einsätze anlöten.
8. Gesteckte Einheit nach vorne schieben bis sie in den Kontaktsitz einrastet.
9. Abschirmung in Richtung Abschirmung abstreifen und kürzen.
10. Montierte Einheit in Tügelhülse stecken und Druckschraube festziehen.

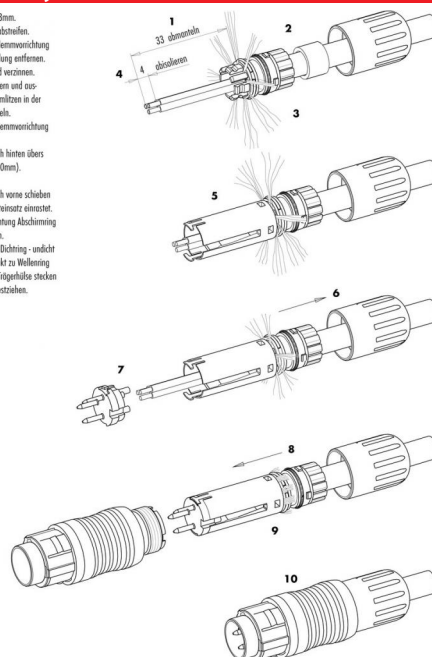

Product description	Push-Pull female cable connector, Contacts: 6 DIN, 4.0 - 8.0 mm, shieldable, solder, IP67
Area	Push-Pull series 440
Order number	99 4818 00 06

Security notices

The connector must not be connected or separated under load. Non-observance and incorrect use can result in personal injury.

The connectors are designed for use in plant, control system and electrical equipment. The end user is responsible for checking whether the connectors are suitable for use in other applications.

Connectors used in electrical circuits containing hazardous life parts must only be assembled and used by or under the supervision of persons with the requisite electrotechnical training, taking the applicable regulations and standards into account.

Connectors with degree of protection IP 67 and IP 68 are not suitable for use under water. When used outdoors, the connectors must be separately protected against corrosion. For further information about IP degrees of protection refer to 'Technical support' in the Download Centre.